

FP6 FOOT PEDAL

FP6 Foot Pedals are suitable for industrial environments where precise speed control is desired.



SPECIFICATIONS

GENERAL DATA

| | |
|--------------------------|---------------------------------|
| Type | Proportional |
| Output Options | Contacts & Potentiometer |
| Pedal Travel | 23 degrees |
| Life | 5 million cycles |
| Materials | Powder-coated aluminum housing. |
| Size | 7.48" x 4" x 4.92" |
| Est Weight | 2.75 lbs |
| Est. Shipping Weight | 4 lbs. |
| Est. Shipping Dimensions | 10 in. x 10 in. x 10 in. |

ENVIRONMENTAL DATA

| | |
|-----------------------|--|
| IP Rating | IP54 |
| Operating Temperature | -13 to +158 degrees F [-25 to +70 degrees C] |

ELECTRICAL DATA


| | |
|------------------------|--|
| Contact Specifications | Switch Type: |
| | 1 N.O. and 1.N.C. double break microswitches. |
| | Max. Number: |
| | Up to 2 contacts |
| | Rating: |
| | 10A 250 VAC Inductive/Resistive 10A 24 VAC Inductive/Resistive |
| | Termination: |
| | .250 x .020 Male Quick Connect |

Additional Specifications Reference product literature for additional specifications

Technical Drawings

Dimensional

All dimensions in inches [mm] and are subject to change.

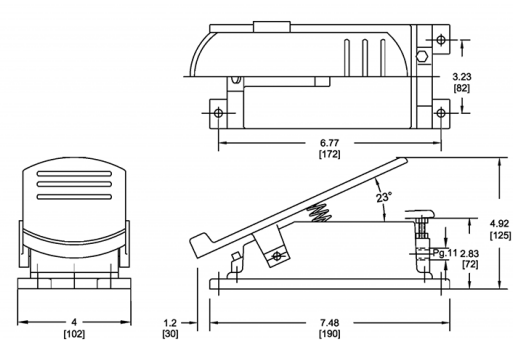

FP6 overall dimensions